



## Examid® PA66 CF30J

carbon fiber reinforced polyamide 66

Technical DataSheet | Supplied by Material Wizard

Examid® PA66 CF30J by Material Wizard is a high-performance polyamide 66 compound reinforced with carbon fiber, engineered for structurally demanding applications requiring high stiffness, strength, and thermal stability.

The material provides a well-balanced combination of tensile strength, flexural rigidity. To the optimized fiber reinforcement system and carefully selected PA66 matrix, Examid® PA66 CF30J exhibits excellent dimensional stability.

This grade is particularly suitable for metal replacement applications, rigid housings, and structural components in industrial, automotive, and technical environments where long-term mechanical integrity and thermal resistance are essential.


<b>Product Type</b>	PA (Polyamide, Nylon) >	PA 66 CF30 (carbon fiber filled)
<b>Applications/ Recommended for</b>	Injection Molding >	High-stress Mechanical Parts Metal Replacement
<b>Key Features</b>	Excellent tensile and flexural properties High thermal resistance Improved impact performance Reduced anisotropy and improved dimensional stability Controlled melt flow behavior	

## Examid® PA66 CF30J Typical Properties

Physical	Value & Unit	Test Condition	Test Method
Density	1.31 g/cm <sup>3</sup>	At 23°C	ISO 1183
Carbon fiber content	30%		internal
Melt Volume Flow Rate (MVR)	12 g/10 min	At 275°C, 2.16kg	ISO 1133
Linear Mold Shrinkage, Flow	0.4 %		internal
Temp. of deflection under load (HDT)	230°C	1.8 MPa	ISO 75-2/B
Mechanical	Value & Unit	Test Condition	Test Method
Flexural Modulus	18200 MPa	At 23°C, 2 mm/min	ISO 178
Flexural Strength	290 MPa	At 23°C, 2 mm/min	ISO 178
Impact Strength, Notched Charpy	7 kJ/m <sup>2</sup>	At 23°C	ISO 179/1eU
Tensile Strength	170 MPa	At 23°C, 10 mm/min	ISO 527-2
Tensile Strain at Break	3%	At 23°C, 10 mm/min	ISO 527-2

# Processing Recommendations

## Processing Conditions > Injection Molding:

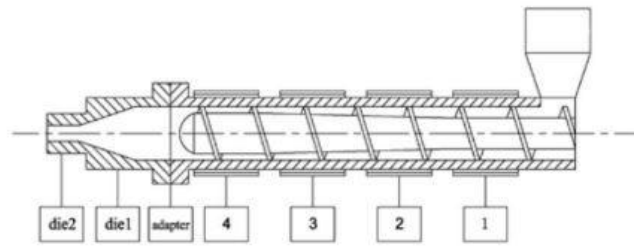

	Zone1	Zone2	Zone3	Zone4	Adaptor	Die1	Die2
°C	270	275	280	285	290	300	310

## Processing Recommendations > Drying:

Our materials are supplied pre-dried in moisture-guarded bags. However, dry materials will rapidly absorb moisture when exposed to the atmosphere. For recyclable products, it must be dried before processing. It is recommended to dry the material at 90-100 °C for 4 hours in a circulating air or dehumidified air dryer. The moisture content must be lower than 0.2% before and during processing.

## Disclaimer

### Standard Disclaimer

The manner in which you use and the purpose to which you put and utilize our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations, are beyond our control. Therefore, it is imperative that you test our products, technical assistance and information to determine to your own satisfaction whether they are suitable for your intended uses and applications. This application-specific analysis must at least include testing to determine suitability from a technical as well as health, safety and environmental standpoint. Such testing has not necessarily been done by us. Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale. All information and technical assistance is given without warranty or guarantee and are subject to change without notice. It is expressly understood and agreed that you assume and hereby release us from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance and information. Any statement or recommendation not contained herein is unauthorized and shall not bind us. Nothing herein shall be construed as a recommendation to use any product in conflict with patents covering any material or its use. No license is implied or in fact granted under the claims of any patent. Typical Properties data is provided as general information only. Property values are approximate and are not part of the product specifications.

## Contact Information

**Email:** [vyekimov@gmail.com](mailto:vyekimov@gmail.com)  
**Website:** [materialwizard.com.ua](http://materialwizard.com.ua)  
**Marketplace:** [polyamide.prom.ua](http://polyamide.prom.ua)  
**Phone:** + 38 050 323 23 21

